
SABINE RIVER AUTHORITY OF TEXAS

TO: INTERESTED PARTIES
FROM: ENVIRONMENTAL SERVICES DIVISION
RE: NOVEMBER 2024 MONTHLY WATER QUALITY REPORT

The Environmental Services Field Offices conducted water quality monitoring in the Sabine Basin from November 12th through the 21st. The results of field monitoring are presented in this report¹ and additional data can be found using the Texas Commission on Environmental Quality (TCEQ) [Clean Rivers Program Data Tool](#).

Sabine Basin Tidal (Including Tributaries)

Weather – Air temperatures in the tidal basin were mild with highs in the low 70s to low 80s. Low temperatures were in the low 40s to mid 60s. The tidal stations received 0.44 inches of rainfall in the seven days prior to the sampling event.

Tidal Conditions – Surface salinity values were greater than 1 ppt at five of the seven tidal stations. The highest salinity value of 11.8 ppt was recorded at station 15654 (BB1) at a depth of 0.3 meters.

Lower Sabine Basin (Toledo Bend Reservoir and the Sabine River downstream to Tidal)

Weather – Air temperatures in the lower basin were mild with highs in the mid 70s to low 80s. Low temperatures were in the upper 40s to mid 50s. Toledo Bend received 0.34 inches of rainfall during the seven days prior to the sampling event.

Lake Level - The level of Toledo Bend was 167.84 feet msl with a release of 260 cfs on the day of sampling. Toledo Bend has a conservation pool level of 172 feet msl. Reservoir profiles indicate a mixed water column.

Upper Sabine Basin (Lake Tawakoni, Lake Fork Reservoir, and the Sabine River upstream of Toledo Bend)

Weather - Air temperatures in the upper basin were mild with highs in the upper 60s to mid 80s. Low temperatures were in the upper 40s to low 60s. Lake Fork and Lake Tawakoni received 3.27 and 1.78 inches of rainfall respectively during the seven days prior to the sampling event.

Lake Level - The level of Lake Tawakoni was 435.03 feet msl with a release of 6 cfs on the day of sampling. The level of Lake Fork was 400.80 feet msl with a release of 60 cfs on the day of sampling. Lake Tawakoni and Lake Fork have conservation pool levels of 437.5 feet msl and 403 feet msl, respectively. Reservoir profiles at Lake Fork and Lake Tawakoni indicated a mixed water column.

This report and additional links to data for these monitoring stations are available at the [Sabine River Authority of Texas website](#). If you have any questions or comments concerning this report, please contact:

- Jerry Wiegrefe, Environmental Services Assistant Division Manager
409-746-3284 (jwiegrefe@sratx.org)
- *Lower and Tidal Sabine Basin*
Kaleb McDade, Field Coordinator
409-746-3284 (kmcdade@sratx.org)
- *Upper Sabine Basin*
Jube Guajardo, Upper Basin Field Biologist
903-878-2262 (jguajardo@sratx.org)

¹ Data in this report is considered preliminary until it is available in TCEQ's Surface Water Quality Monitoring Information System database.

SABINE RIVER AUTHORITY OF TEXAS
Monthly Water Quality Report


Table of Contents

Fixed Monitoring Stations	4
Segment 0501 – Sabine River Tidal.....	5
Segment 0502 - Sabine River Above Tidal.....	7
Segment 0503 - Sabine River Above Caney Creek	9
Segment 0504 – Toledo Bend Reservoir.....	11
Segment 0505 - Sabine River Above Toledo Bend Reservoir	16
Segment 0506 - Sabine River Below Lake Tawakoni	18
Segment 0507 - Lake Tawakoni	22

Table of Figures

Sabine Basin Map	3
Segment 0501, 508 & 511.....	6
Segment 0502 & 513.....	8
Segment 0503.....	10
Toledo Bend Reservoir Profiles	14
Segment 0504.....	15
Segment 0505.....	17
Lake Fork Reservoir Profiles.....	20
Segment 0506, 0512, 0514 & 0515.....	21
Lake Tawakoni Reservoir Profiles	23
Segment 0507.....	24

Sabine Basin Map

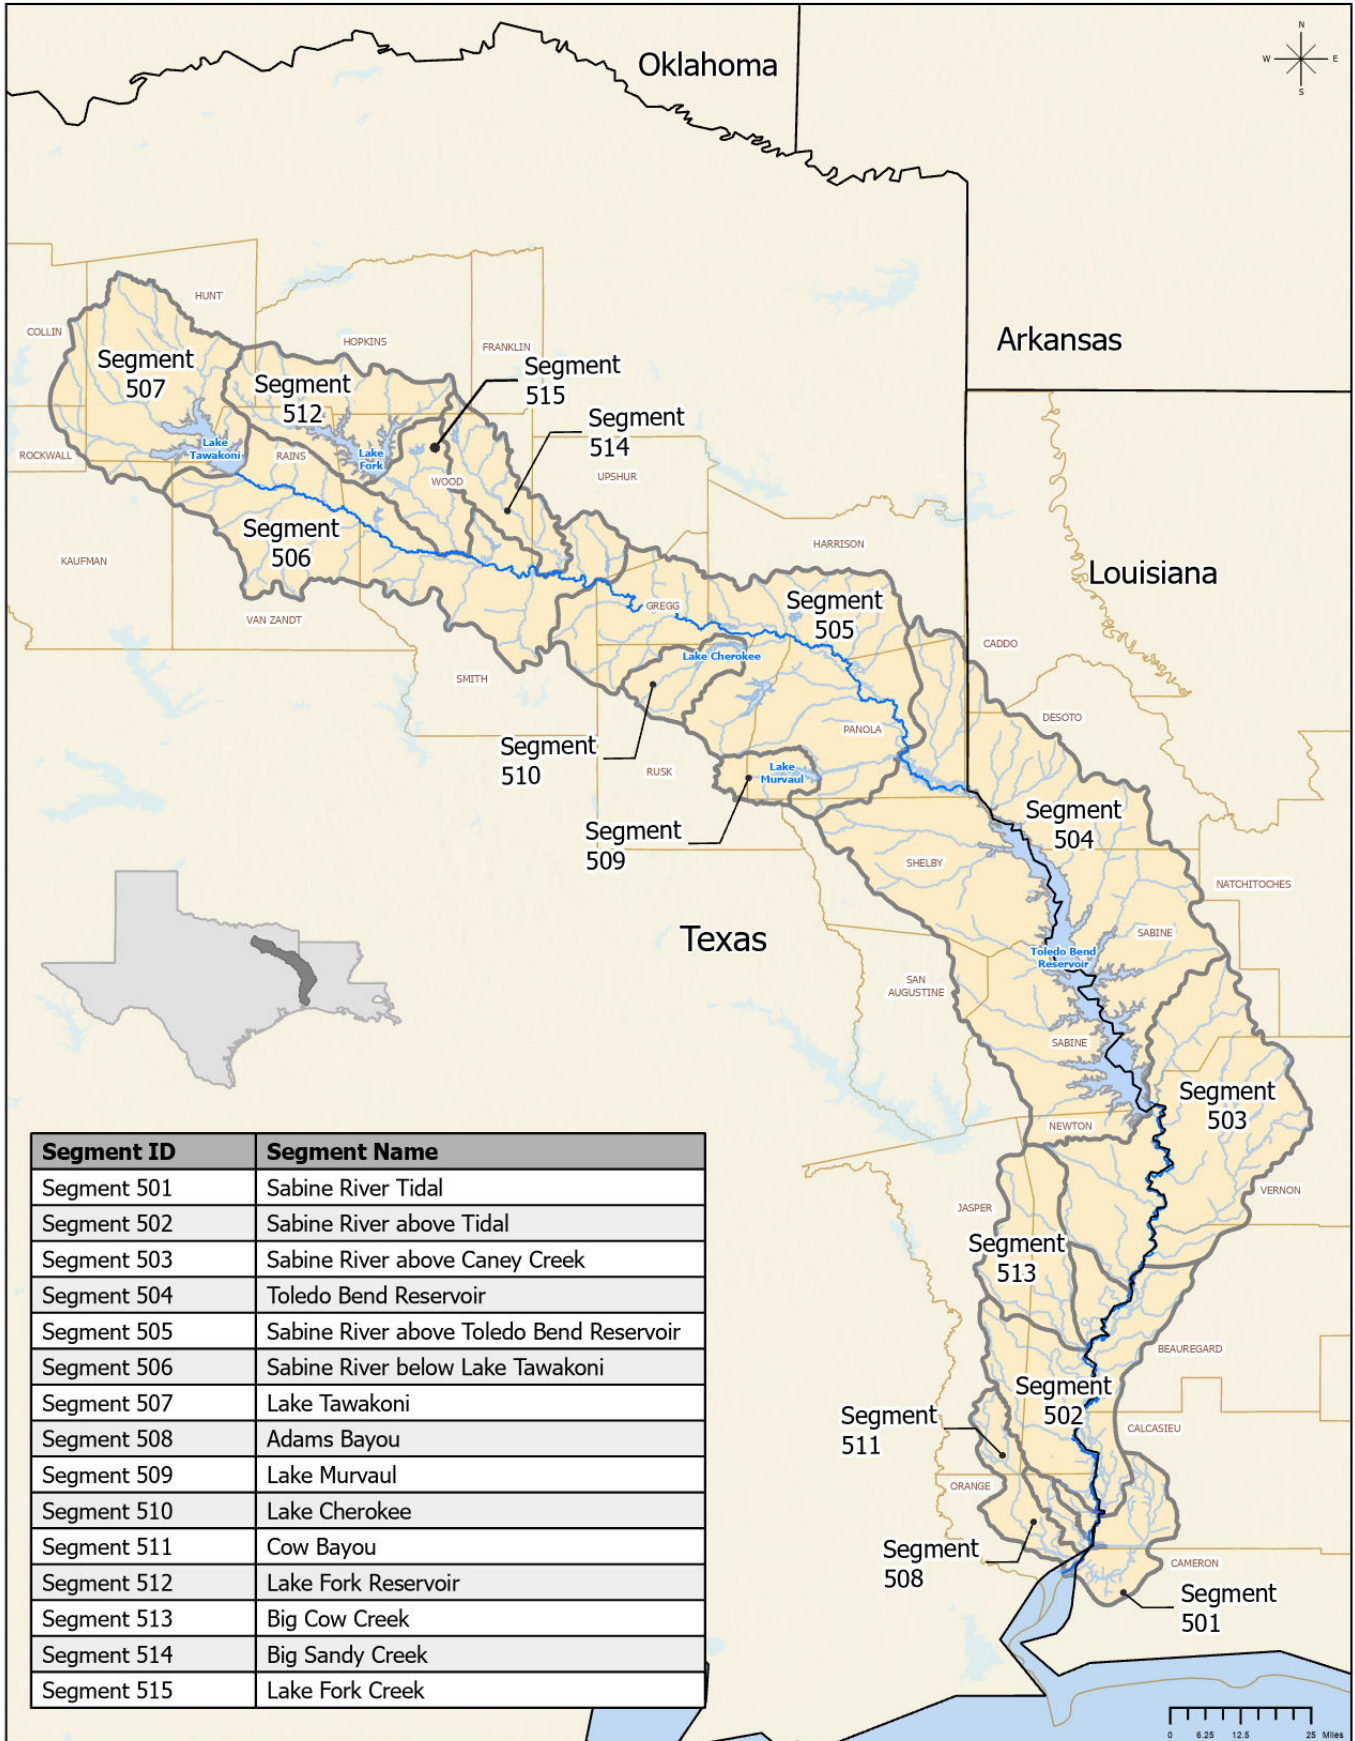

Current Fixed Monitoring Stations

Segment	Station TCEQ ID (SRA-TX ID)	Location
501	10391 (SRT1)	SABINE RIVER AT CHANNEL CAN 3
501	15654 (BB1)	BLACK BAYOU IN CAMERON PARISH
511	10449 (CB1)	COW BAYOU AT ROUND BUNCH ROAD
508	10441 (AB2)	ADAMS BAYOU AT FM 1006
501	15653 (ICW1)	INTERCOASTAL WATERWAY AT PERRY RIDGE
501	10394 (SRT2)	SABINE RIVER AT IH 10
501	10395 (SR1)	SABINE RIVER 12.00 KM UPSTREAM OF IH 10
502	10397 (SR2)	SABINE RIVER AT SH 12 NORTH OF DEWEYVILLE TX.
513	10465 (BCC1)	BIG COW CREEK AT FM 1416 SOUTH OF BON WIER
503	10398 (SR3)	SABINE RIVER AT US 190 EAST OF BON WIER TX.
503	10340 (BA4)	ANACOCO BAYOU AT LOUISIANA HWY 111 CROSSING SOUTHWEST OF KNIGHT LA.
503	10399 (SR5)	SABINE RIVER AT SH 63 EAST OF BURKEVILLE TX.
503	10401 (TB6S)	SABINE RIVER BELOW TOLEDO BEND RESERVOIR AT RIGHT ABUTMENT OF SPILLWAY FOR DAM
503	15660 (BT1)	BAYOU TORO AT LA SH 392 IN SABINE PARISH SW OF HORNBECK LA.
504	10404 (TB6A)	TOLEDO BEND RESERVOIR MAIN LAKE ABOVE THE DAM AT THE OLD RIVER CHANNEL
504	10406 (TB6C)	TOLEDO BEND RESERVOIR IN SIX MILE BOAT LANE 0.8KM EAST OF SH 87
504	18054 (TB6Q)	TOLEDO BEND RESERVOIR IN NEGREET BAYOU
504	10411 (TB6F)	TOLEDO BEND RESERVOIR IN SUNSHINE BAY NEAR FM 3121 BRIDGE
504	10402 (TB6H)	TOLEDO BEND RESERVOIR AT SH 21 NORTHEAST OF MILAM
504	15659 (TB6K)	TOLEDO BEND RESERVOIR IN LANANA BAYOU AT LOUISIANA SH 191 IN SABINE PARISH LOUISIANA WEST OF MANY
504	15655 (TB6J)	TOLEDO BEND RESERVOIR PATROON BAYOU BRANCH AT FM 276
504	18053 (TB6LN)	TOLEDO BEND RESERVOIR SAN MIGUEL ARM BOAT LANE
504	18052 (TB6R)	TOLEDO BEND RESERVOIR AT RAGTOWN
505	10415 (SR10)	SABINE RIVER AT FM 2517
505	13628 (SR11)	SABINE RIVER AT US 59
505	10427 (SR16)	SABINE RIVER AT SH 42
505	10423 (SR14)	SABINE RIVER AT SH 149 SOUTH OF LONGVIEW TX
506	10428 (SR17)	SABINE RIVER AT US 271
506	10429 (SR19)	SABINE RIVER AT SH 14 S. OF HAWKINS
506	10430 (SR21)	SABINE RIVER AT US 69
514	10468 (BS1)	BIG SANDY CREEK AT SH 155
515	10469 (LF20)	LAKE FORK CREEK AT US 80
512	10458 (LF2)	LAKE FORK RESERVOIR NEAR DAM IN CREEK CHANNEL
512	10462 (LF4)	LAKE FORK RESERVOIR MID-COVE IN LAKE FORK CREEK ARM AT FM 515
512	10461 (LF3)	LAKE FORK RESERVOIR MID-ARM IN CANEY CREEK ARM AT FM 515
507	10434 (LT23A)	LAKE TAWAKONI IN THE MAIN LAKE NEAR THE DAM
507	21173 (LT23DN)	LAKE TAWAKONI IN WACO BAY EQUIDISTANT FROM FINGER AND SPRING POINTS 1.17KM BEARING 18.61 DEGREES FROM IRON BRIDGE PUMPING STATION
507	10437 (LT23B)	LAKE TAWAKONI AT SH 276

Segment 0501 – Sabine River Tidal

Description: The designated segment includes the Sabine River from the confluence with Sabine Lake in Orange County to Morgans Bluff in Orange County. Although some areas are quite rural, this part of the Sabine Basin has two cities with populations greater than 5,000 and a variety of industries.


Segment 0508 – Adams Bayou Tidal The segment reaches from the confluence with the Sabine River in Orange County to a point 1.1 kilometers (0.7 miles) upstream of IH-10 in Orange County.

Segment 0511 – Cow Bayou Tidal The segment reaches from the confluence with the Sabine River in Orange County to a point 4.8 kilometers (3.0 miles) upstream of IH-10 in Orange County.

Segment 0501 Water Quality

Date and Time	Station	Depth	Temp	pH	DO	% Sat	Cond	TDS	Salinity	Secchi	Turbidity	Enterococcus
		<i>meters</i>	<i>°C</i>	<i>SU</i>	<i>mg/L</i>		<i>µS/cm</i>	<i>mg/L</i>	<i>ppt</i>	<i>meters</i>	<i>NTU</i>	<i>mpn/100mL</i>
11/21/24 09:40	10391 (SRT1)	0.3	20.4	7.2	6.2	72	16,000	10,200	9.3	0.65	8.64	<10
		2.5	19.6	7.2	6.2	72	16,500	10,500	9.7			
		5.0	19.5	7.2	6.0	69	17,000	10,800	9.9			
		7.5	19.5	7.3	5.8	67	18,200	11,700	10.8			
		10.0	19.6	7.4	5.0	58	18,900	12,100	11.2			
11/21/24 09:23	15654 (BB1)	0.3	17.2	7.2	5.9	65	19,800	12,700	11.8	1.0	7.16	31
		1.5	17.2	7.2	5.8	65	19,800	12,700	11.8			
		3.0	17.2	7.2	5.9	65	19,800	12,700	11.8			
Segment 0511												
11/21/24 09:00	10449 (CB1)	0.3	19.4	7.1	6.3	72	14,400	9,220	8.4	0.34	20.8	84
		2.0	19.3	7.1	6.2	70	14,500	9,290	8.4			
		4.0	18.8	7.0	5.6	66	14,600	9,320	8.4			
Segment 0508												
11/21/24 10:00	10441 (AB2)	0.3	19.7	7.1	5.5	62	13,400	8,550	7.7	0.54	8.40	85
		2.0	19.6	7.1	5.3	60	13,300	8,540	7.7			
		4.0	19.5	7.1	4.8	53	13,300	8,530	7.7			
11/21/24 10:17	15653 (ICW1)	0.3	18.6	7.2	6.7	76	19,900	12,700	11.8	0.48	10.9	41
		2.5	18.6	7.2	6.7	76	19,900	12,700	11.8			
		5.0	18.7	7.2	6.4	75	20,000	12,800	11.8			
11/21/24 11:08	10394 (SRT2)	0.3	20.4	7.0	5.6	62	796	507	0.4	0.36	21.1	10
		2.0	20.4	7.1	5.3	59	1,400	912	0.8			
		4.0	21.0	7.1	5.6	63	4,880	3,110	2.7			
		6.0	21.7	7.1	5.6	65	8,680	5,650	5.0			
		8.0	21.9	7.0	5.4	63	11,700	7,510	6.7			
11/21/24 11:44	10395 (SR1)	0.3	20.1	7.2	6.9	75	188	120	0.1	0.23	34.6	20

Segments 0501, 0508 & 0511

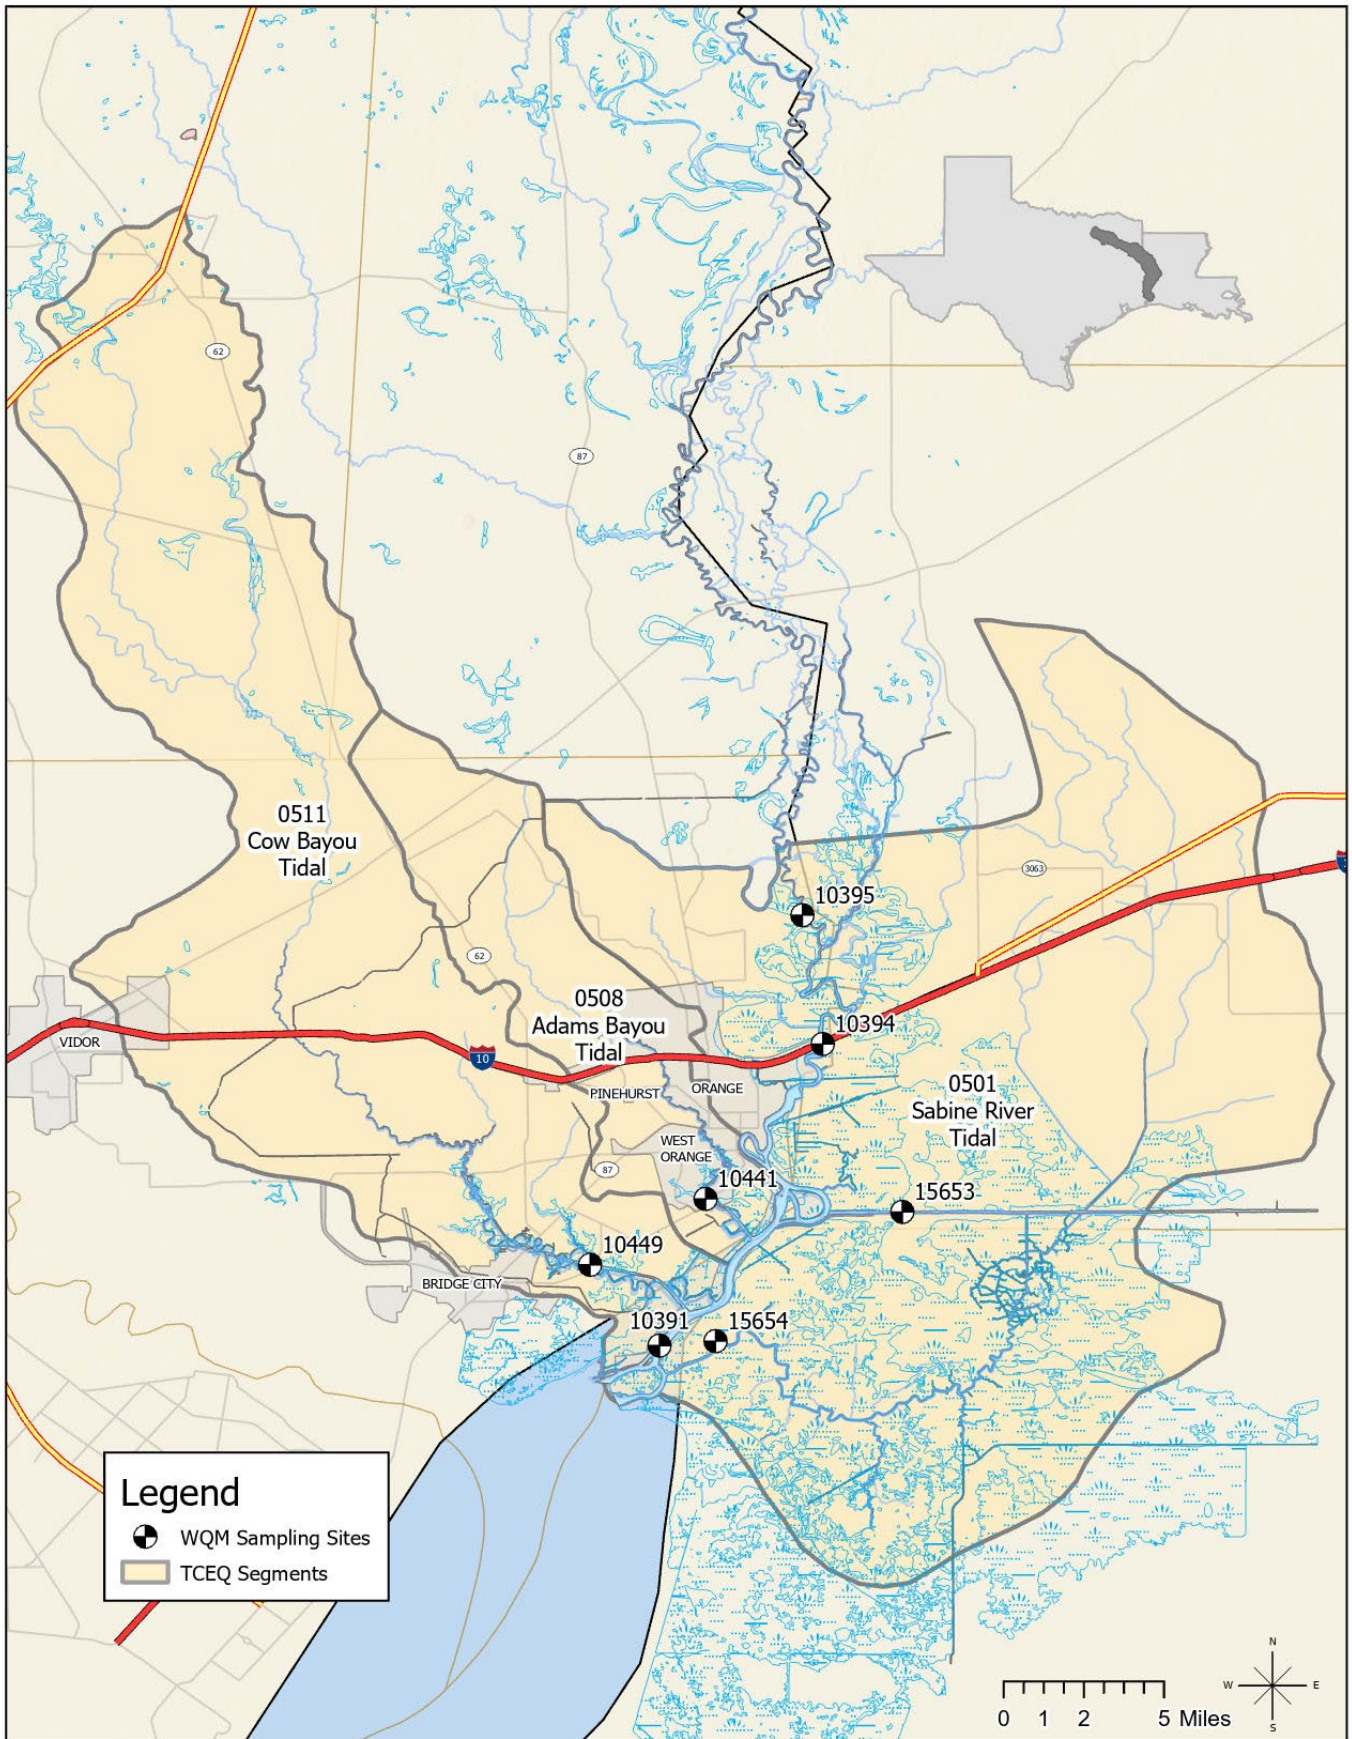

Segment 0502 - Sabine River Above Tidal

Description: The designated segment includes the Sabine River from Morgans Bluff in Orange County to the confluence with Caney Creek in Newton County. The largest tributary is Big Cow Creek (Segment 0513). This is largely a rural area with no major industries or cities.

Segment 0513 – Big Cow Creek The segment reaches from the confluence with the Sabine River in Newton County to a point 4.6 kilometers (2.9 miles) upstream of CR 255 in Newton County.

Segment 0502 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
11/20/24 08:13	10397(SR2)	08030500	Sabine River near Ruliff, TX	1,220

Segments 0502 and 0513 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
11/20/24 08:13	10397 (SR2)	0.3	20.4	7.0	7.5	83	191	122	0.17	43.0	219
Segment 0513											
11/20/24 09:28	10465 (BCC1)	0.3	17.7	6.3	8.8	92	29	19	0.20	35.7	770

Segments 0502 & 0513



Segment 0503 - Sabine River Above Caney Creek

Description: The designated segment includes the Sabine River from a point immediately upstream of the confluence with Caney Creek in Newton County up to Toledo Bend Dam in Newton County. This is largely a rural area, including one major city with a population greater than 5,000 and few industries. Two major tributaries that flow from Louisiana include Bayou Anacoco and Bayou Toro.


Segment 0503 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
11/20/24 11:44	10398(SR3)	08028500	Sabine River near Bon Wier, TX	2,530
11/20/24 10:33	10399(SR5)	08026000	Sabine River near Burkeville, TX	584

Segment 0503 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond μS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
11/20/24 11:44	10398 (SR3)	0.3	19.9	7.1	7.6	84	220	141	0.11	95.4	1,733
11/20/24 11:21	10340 (BA4)	0.3	20.3	7.2	7.0	77	354	226	0.08	130	1,986
11/20/24 10:33	10399 (SR5)	0.3	19.5	6.3	7.4	80	63	40	0.09	118	>2,420
11/18/24 12:17	10401 (TB6S)	0.3	23.0	7.6	8.7	102	109	70	1.0	2.75	10
11/18/24 11:57	15660 (BT1)	0.3	19.0	6.9	8.5	93	69	44	0.50	16.1	68

Segment 0503

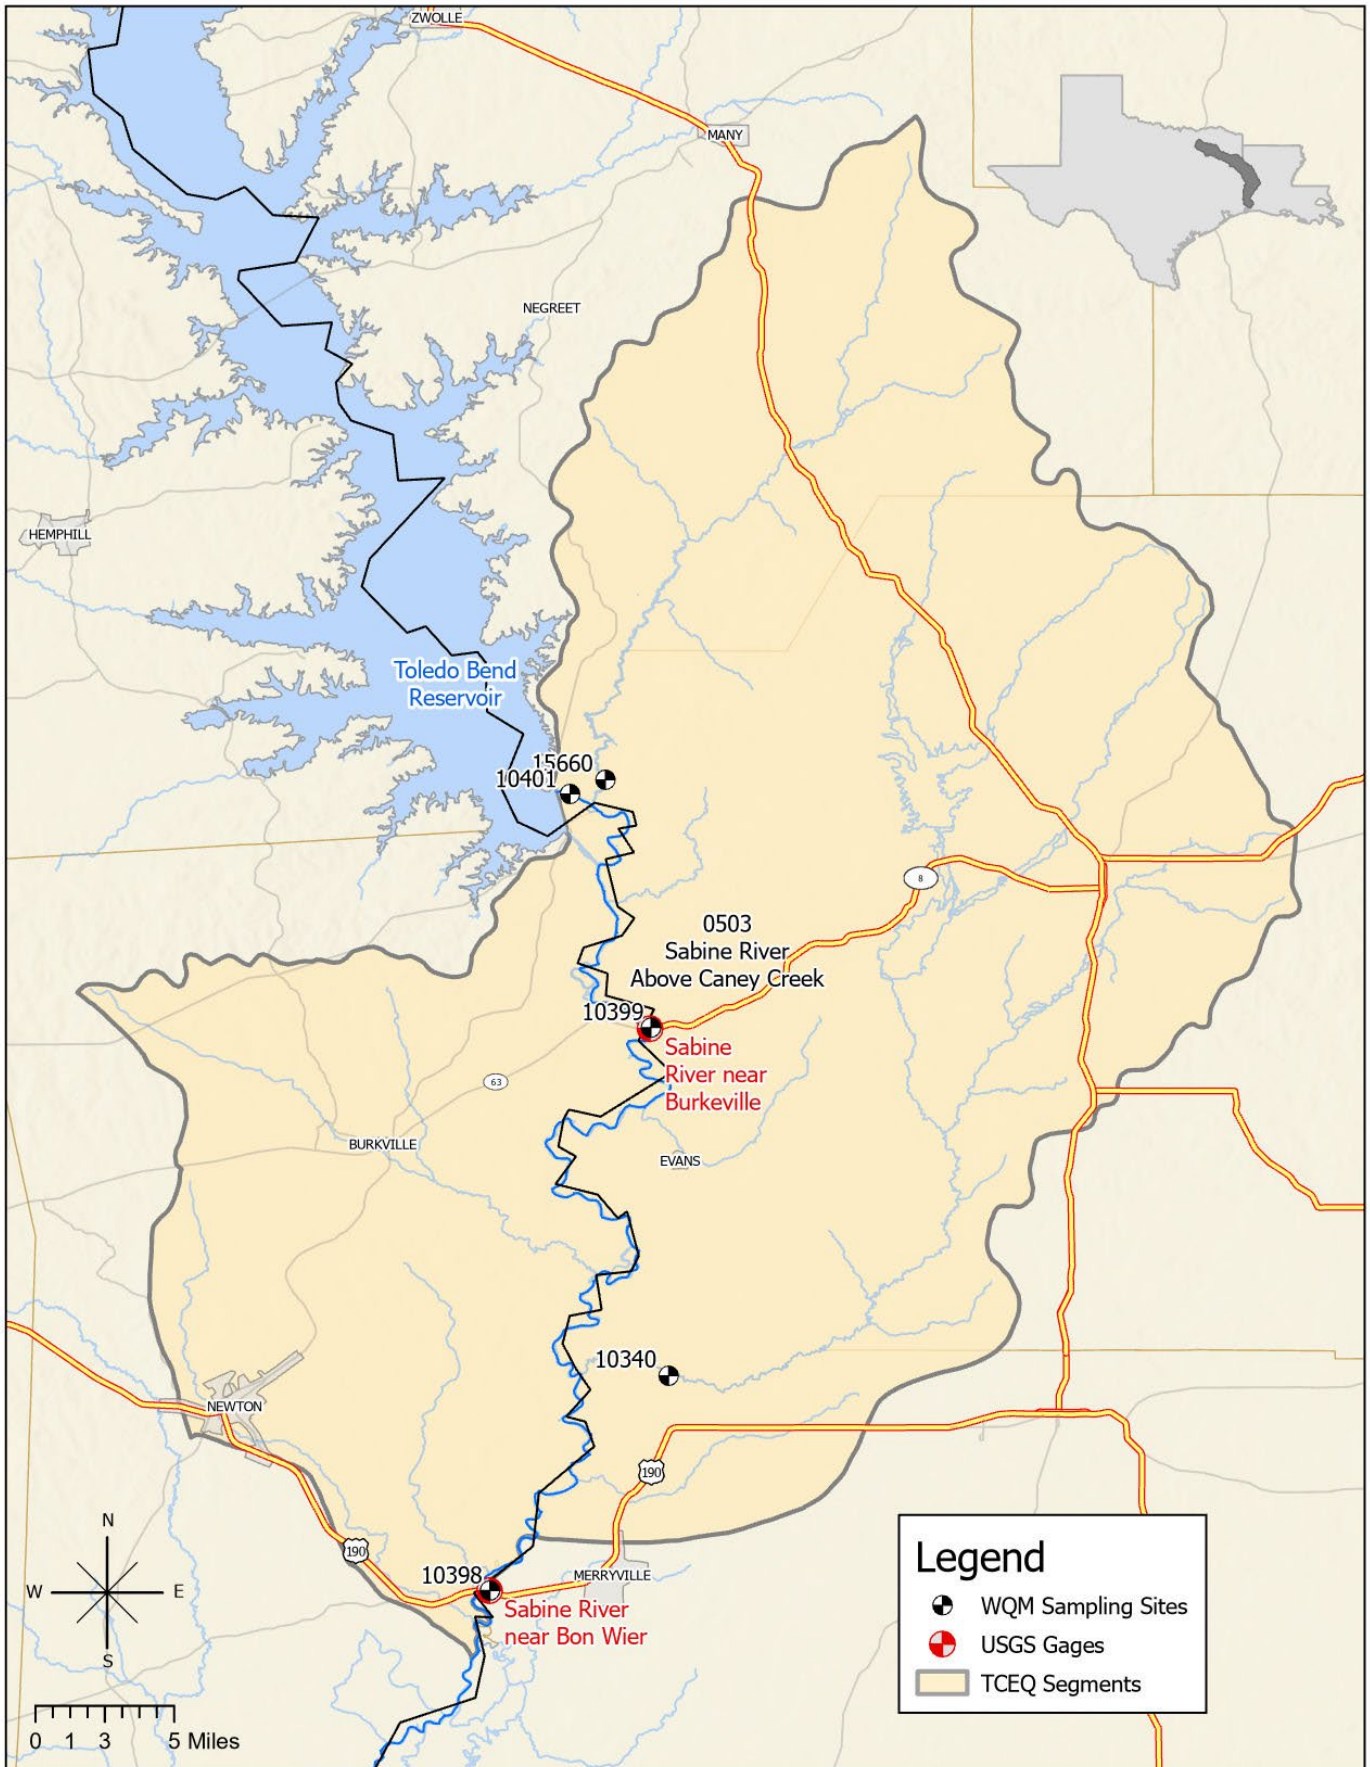

Segment 0504 – Toledo Bend Reservoir

Description: The designated segment includes the Sabine River from Toledo Bend Dam in Newton County to a point immediately upstream of the confluence of Murvaul Creek in Panola County. Although this area is largely rural, it includes two cities with populations greater than 5,000. Murvaul Creek is a major tributary that enters upstream of the reservoir.

Segment 0504 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
11/19/24 14:09	10404 (TB6A)	0.3	23.7	7.2	7.6	91	422	270	1.4	1.64	1
		1.0	22.5	7.1	7.4	88	469	300			
		2.0	22.4	7.1	6.6	77	486	311			
		3.0	22.4	7.1	6.6	76	490	314			
		4.0	22.3	7.1	6.6	76	492	315			
		5.0	22.3	7.1	6.5	76	493	316			
		8.0	22.3	7.0	6.2	73	494	316			
		11.0	22.2	7.0	6.1	71	495	317			
		14.0	22.2	7.0	6.1	71	496	318			
		17.0	22.1	7.1	6.0	70	491	315			
		20.0	21.7	7.0	4.1	48	488	312			
		23.0	19.9	6.9	<0.1	<1	499	319			
		24.0	20.2	6.9	<0.1	<1	497	318			
11/19/24 07:58	10406 (TB6C)	0.3	20.9	7.4	8.3	94	106	68	0.96	6.04	3
		1.0	21.2	7.2	8.2	94	105	67			
		2.0	21.4	7.2	8.0	92	105	67			
		3.0	21.4	7.2	8.0	91	105	67			
11/19/24 12:42	18054 (TB6Q)	0.3	23.0	7.5	8.5	101	110	70	1.1	2.79	2
		1.0	22.4	7.3	7.6	88	110	70			
		2.0	22.1	7.1	6.9	80	110	70			
		3.0	21.2	7.0	6.9	79	110	70			
		4.0	22.0	7.1	7.0	80	109	70			
		5.0	21.9	7.1	7.0	81	110	70			
		6.0	21.9	7.1	7.3	84	110	70			
		7.0	21.9	7.2	7.6	88	110	70			
		8.0	21.9	7.2	7.5	87	110	70			


Segment 0504 Water Quality Continued

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
11/18/24 10:06	10411 (TB6F)	0.3	22.0	7.4	8.2	94	96	62	0.47	10.2	2
		1.0	21.9	7.4	8.2	94	96	62			
		2.0	21.8	7.4	8.2	94	96	62			
		3.0	21.8	7.3	8.1	93	96	62			
		4.0	21.7	7.3	7.9	90	97	62			
11/19/24 09:15	10402 (TB6H)	0.3	21.6	7.3	8.1	93	115	74	1.0	3.23	<1
		1.0	21.6	7.4	8.0	92	115	74			
		2.0	21.6	7.3	7.9	91	116	74			
		3.0	21.5	7.3	7.7	88	115	74			
		4.0	21.5	7.3	7.6	88	116	74			
		5.0	21.5	7.3	7.6	88	116	74			
		6.0	21.5	7.3	7.7	88	116	74			
		7.0	21.5	7.3	7.7	89	115	74			
		8.0	21.5	7.2	7.8	89	115	74			
		9.0	21.5	7.2	7.5	86	116	74			
		10.0	21.5	7.2	7.5	86	116	74			
		11.0	21.4	7.2	7.4	85	116	75			
		12.0	21.3	7.2	7.5	85	116	74			
		13.0	21.3	7.2	7.5	85	116	74			
		14.0	21.3	7.2	7.5	86	116	74			
		15.0	21.3	7.2	7.4	85	116	74			
		16.0	21.2	7.1	7.3	84	116	75			
11/18/24 10:35	15659 (TB6K)	0.3	21.5	7.2	7.5	86	119	76	0.46	8.68	<1
		1.0	21.5	7.2	7.5	85	119	76			
		2.0	21.5	7.2	7.6	86	119	76			
		3.0	21.4	7.2	7.6	88	119	76			
		4.0	21.4	7.2	7.6	85	118	76			
		5.0	21.3	7.2	7.3	83	119	76			
		6.0	21.3	7.1	7.1	81	120	77			
		7.0	21.3	7.1	7.2	82	119	76			
		8.0	21.2	7.1	7.1	81	119	77			
11/18/24 09:33	15655 (TB6J)	0.3	21.0	7.6	8.5	96	122	78	0.42	10.3	<1
		1.0	20.9	7.6	8.6	96	122	78			
		2.0	20.8	7.6	8.5	96	122	78			
		3.0	20.8	7.5	8.4	94	122	78			


Segment 0504 Water Quality Continued

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
11/19/24 10:37	18053 (TB6LN)	0.3	21.8	7.7	8.9	104	119	76	0.78	6.08	<1
		1.0	21.6	7.6	8.8	101	119	76			
		2.0	21.5	7.4	8.2	94	118	76			
		3.0	21.4	7.3	7.9	90	118	76			
		4.0	21.4	7.3	7.8	90	118	76			
		5.0	21.4	7.3	7.7	88	118	76			
	18052 (TB6R)	0.3									
		1.0	No samples or water quality taken at this site. Unable to launch boat due to shallow water.								
		2.0									
		3.0									
		4.0									
		5.0									
		6.0									
		7.0									
		8.0									
		9.0									
		10.0									
		11.0									
		12.0									


Toledo Bend Reservoir Profiles

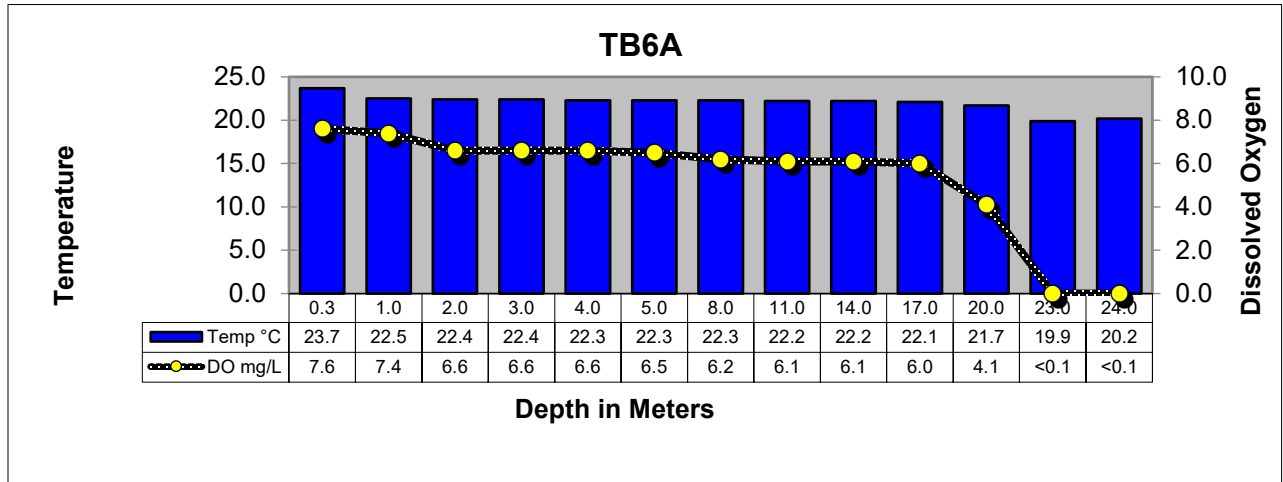

TOLEDO BEND RESERVOIR MAIN LAKE ABOVE THE DAM AT THE OLD RIVER CHANNEL

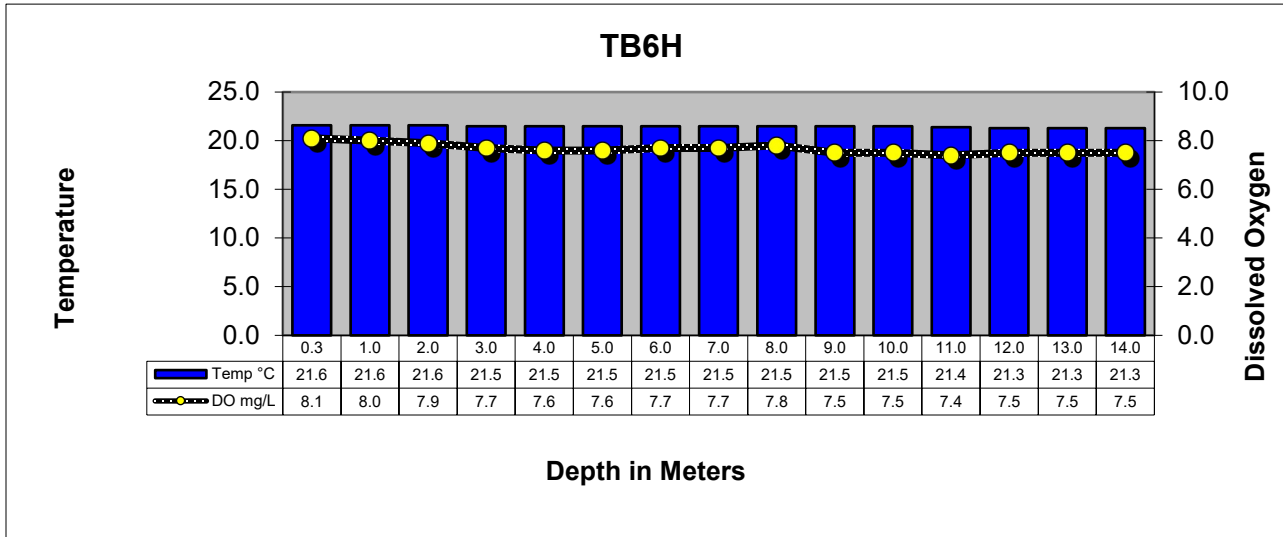

TOLEDO BEND RESERVOIR AT SH 21 NORTHEAST OF MILAM

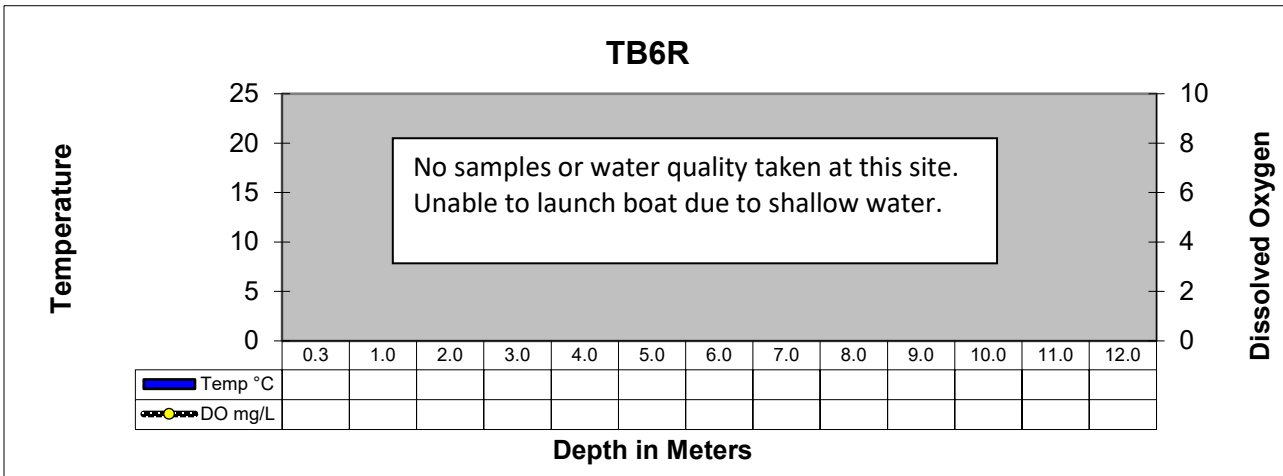

TOLEDO BEND RESERVOIR AT RAGTOWN

Segment 0504



Segment 0505 - Sabine River Above Toledo Bend Reservoir

Description: The designated segment includes the Sabine River from a point immediately upstream of the confluence of Murvaul Creek in Panola County to a point 100 meters (110 yards) downstream of US 271 in Gregg County. Segment 0505 is used extensively for water supply and contains the highest concentration of population in the Sabine Basin with six cities having populations greater than 5,000. Segment 0505 includes a large section of the East Texas Oilfield as well as numerous industries.


Segment 0505 USGS Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
11/13/24 08:46	13628(SR11)	08022040	Sabine River near Beckville, TX	576
11/13/24 07:42	10423(SR14)	08020990	Sabine River near Longview, TX	422

Segment 0505 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
11/13/24 09:17	10415(SR10)	0.3	19.8	7.0	6.4	71	219	140	0.20	53.5	88
11/13/24 08:46	13628(SR11)	0.3	19.2	7.1	6.6	73	269	172	0.17	61.6	75
11/13/24 07:42	10423(SR14)	0.3	19.0	7.0	6.7	74	216	138	0.17	53.2	73
11/13/24 07:12	10427(SR16)	0.3	18.5	6.9	6.6	71	265	170	0.20	46.0	41

Segment 0505

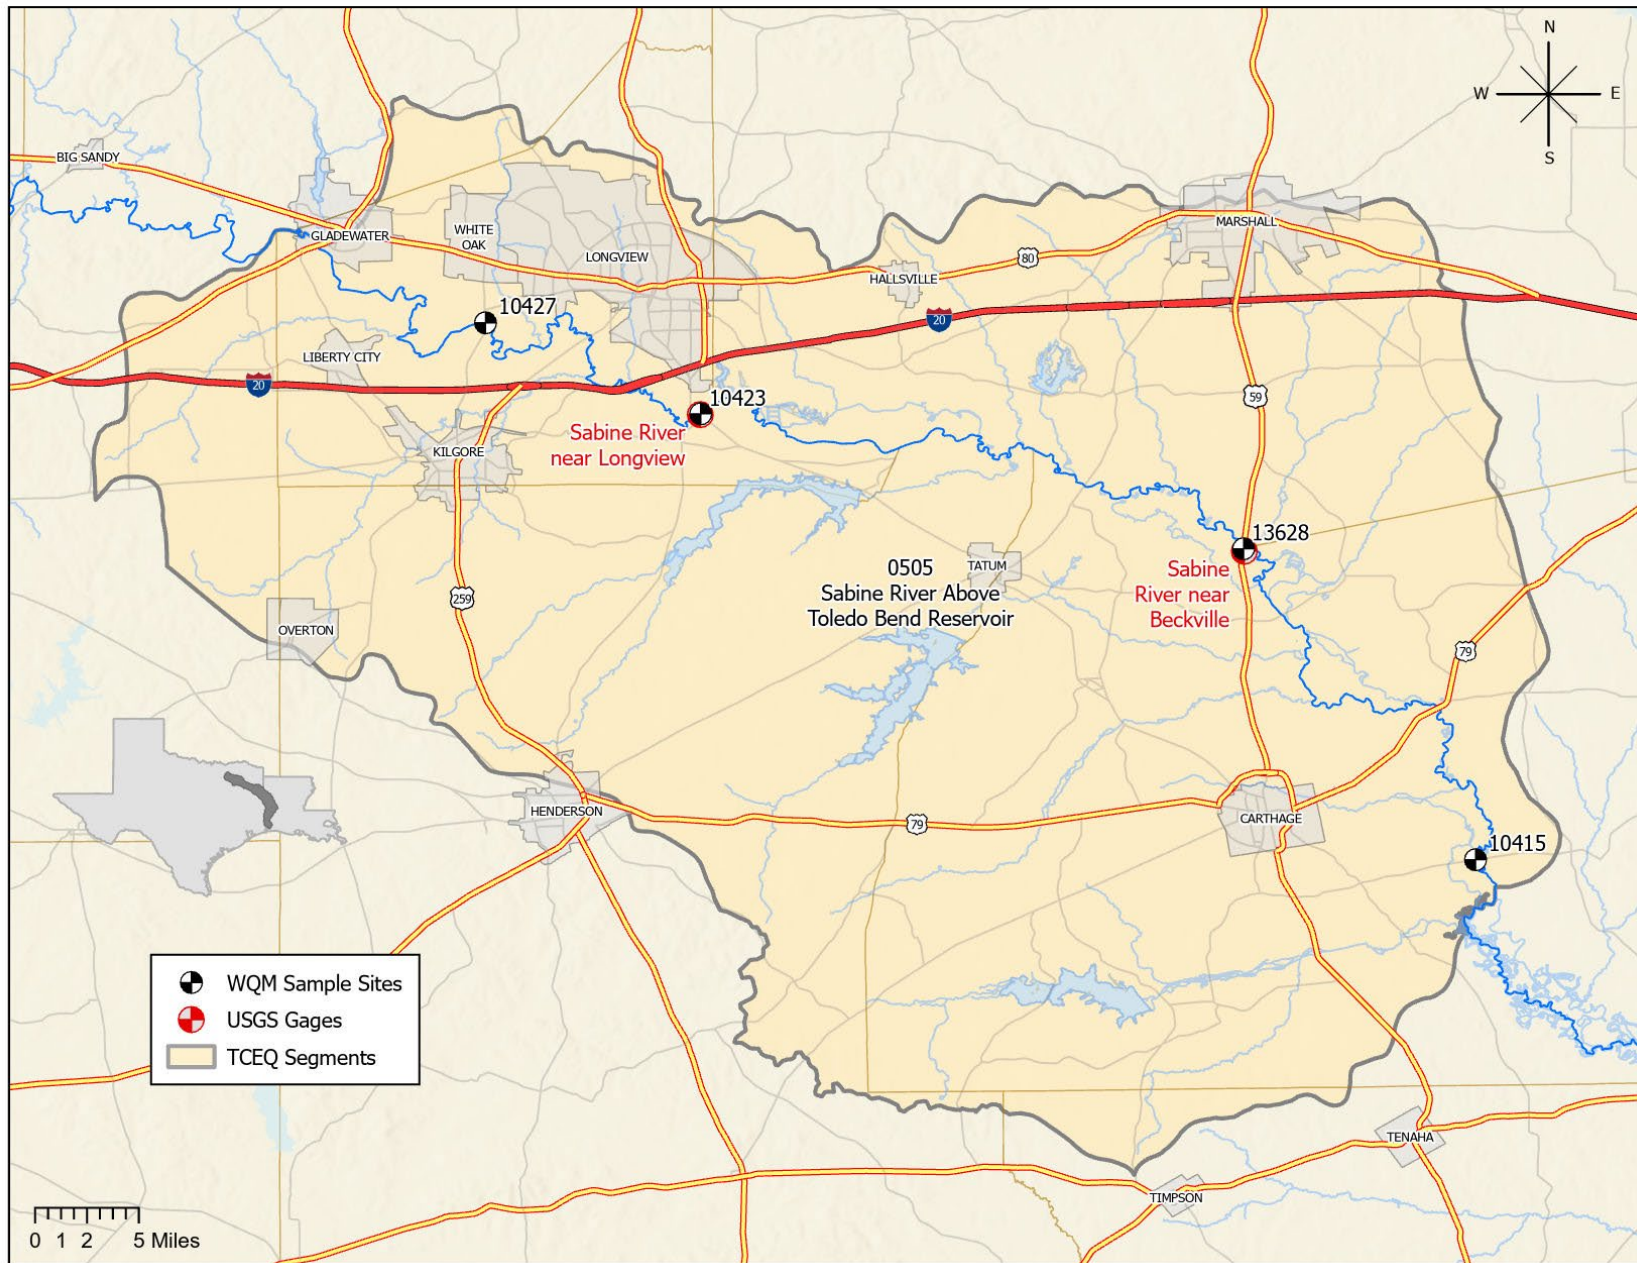

Segment 0506 - Sabine River Below Lake Tawakoni

Description: The designated segment includes the Sabine River from a point 100 meters (110 yards) downstream of US 271 in Gregg County to Iron Bridge Dam in Rains County. This is largely a rural area with no cities having a population greater than 5,000. Oilfield activities, rural housing developments, and agriculture are in the watershed. The major tributaries include:

Segment 0514 - Big Sandy Creek The segment reaches from the confluence with the Sabine River in Upshur County to a point 2.6 kilometers (1.6 miles) upstream of SH 11 in Hopkins County.

Segment 0515 - Lake Fork Creek The segment reaches from the confluence with the Sabine River in Wood County to Lake Fork Dam in Wood County.

Segment 0512 - Lake Fork Reservoir The segment reaches from Lake Fork Dam in Wood County up to the normal pool elevation of 403 feet msl.

Segment 0506 USGS- Recorded Flows

Date and Time	Station	USGS Station #	Location	Flow (cfs)
11/13/24 06:43	10428(SR17)	08020000	Sabine River near Gladewater, TX	312
11/12/24 14:34	10429(SR19)	08019200	Sabine River near Hawkins, TX	159
11/12/24 13:11	10430(SR21)	08018500	Sabine River near Mineola, TX	20
Segment 0514				
11/12/24 15:00	10468(BS1)	08019500	Big Sandy Creek near Big Sandy, TX	53


Segment 0506 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
11/13/24 06:43	10428(SR17)	0.3	17.9	6.7	7.0	75	221	141	0.19	50.3	219
11/12/24 14:34	10429(SR19)	0.3	19.2	7.5	8.7	95	1,431	915	0.13	55.9	27
11/12/24 13:11	10430(SR21)	0.3	17.1	7.7	7.5	78	521	334	0.12	72.8	548
Segment 0514											
11/12/24 15:00	10468(BS1)	0.3	18.2	6.9	6.9	87	163	101	0.70	12.0	113
Segment 0515											
11/12/24 14:09	10469(LF20)	0.3	18.5	7.6	8.1	87	181	116	0.17	44.2	173


Segment 0506 Water Quality Continued

Date and Time	Station	Depth meters	Temp °C	pH SU	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E. coli</i> mpn/100mL
Segment 0512											
11/12/24 12:14	10458(LF2)	0.3	21.5	7.3	5.8	64	174	111	>1.2	2.69	3
		1.0	21.4	7.3	5.5	62	174	111			
		2.0	21.3	7.2	5.3	59	174	111			
		3.0	21.3	7.2	5.2	59	174	111			
		4.0	21.2	7.2	5.2	59	174	111			
		5.0	21.2	7.1	5.2	59	174	111			
		6.0	21.2	7.0	5.2	59	174	111			
		7.0	21.2	7.0	5.2	59	174	111			
		8.0	21.2	7.0	5.2	59	174	111			
		9.0	21.2	6.9	5.2	59	174	111			
		10.0	21.2	6.9	5.0	56	174	111			
		11.0	21.2	6.8	4.4	49	174	111			
		12.0	21.2	6.8	4.1	47	175	112			
		13.0	21.1	6.8	3.9	43	175	112			
		14.0	21.1	6.8	3.8	43	175	112			
		15.0	21.0	6.8	4.3	49	174	111			
		16.0	21.0	6.8	4.4	49	175	112			
11/12/24 11:03	10462(LF4)	0.3	21.4	7.3	8.2	94	173	111	0.50	4.09	2
		1.0	21.4	7.7	8.2	93	173	111			
		2.0	21.4	7.7	8.2	93	173	111			
		3.0	21.4	7.6	8.1	92	173	1111			
		4.0	21.4	7.6	8.1	92	173	111			
		5.0	21.4	7.5	8.0	91	173	111			
		6.0	21.4	7.5	8.0	91	173	111			
		7.0	21.3	7.4	7.9	89	173	111			
		8.0	21.3	7.3	7.9	88	173	110			
		9.0	21.3	7.2	7.6	86	174	110			
		10.0	21.3	7.2	7.5	83	173	110			
		11.0	21.3	7.1	6.9	77	181	115			
11/12/24 11:29	10461(LF3)	0.3	21.2	7.5	7.0	80	175	111	0.45	7.45	1
		1.0	21.2	7.4	7.1	80	174	111			
		2.0	21.0	7.4	7.1	80	173	111			
		3.0	21.0	7.4	7.1	80	173	111			
		4.0	21.0	7.4	7.1	80	173	111			
		5.0	21.0	7.3	7.0	78	173	111			
		6.0	21.0	7.2	6.9	77	173	111			
		7.0	21.0	7.2	6.8	76	173	111			
		8.0	21.0	7.1	6.6	73	174	112			
		9.0	21.0	7.0	5.5	53	195	130			


Lake Fork Reservoir Profiles

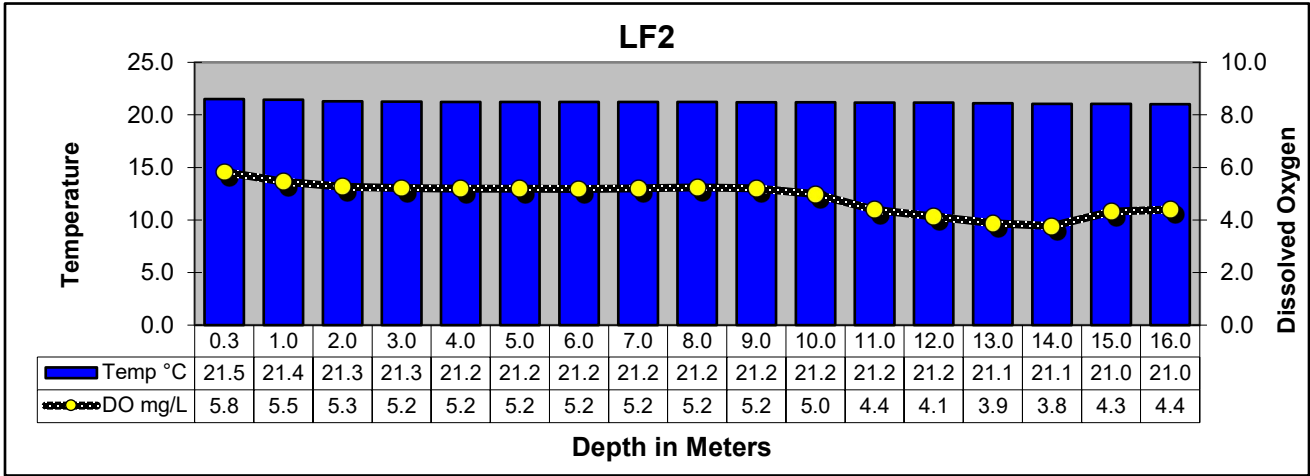

LAKE FORK RESERVOIR NEAR DAM IN CREEK CHANNEL

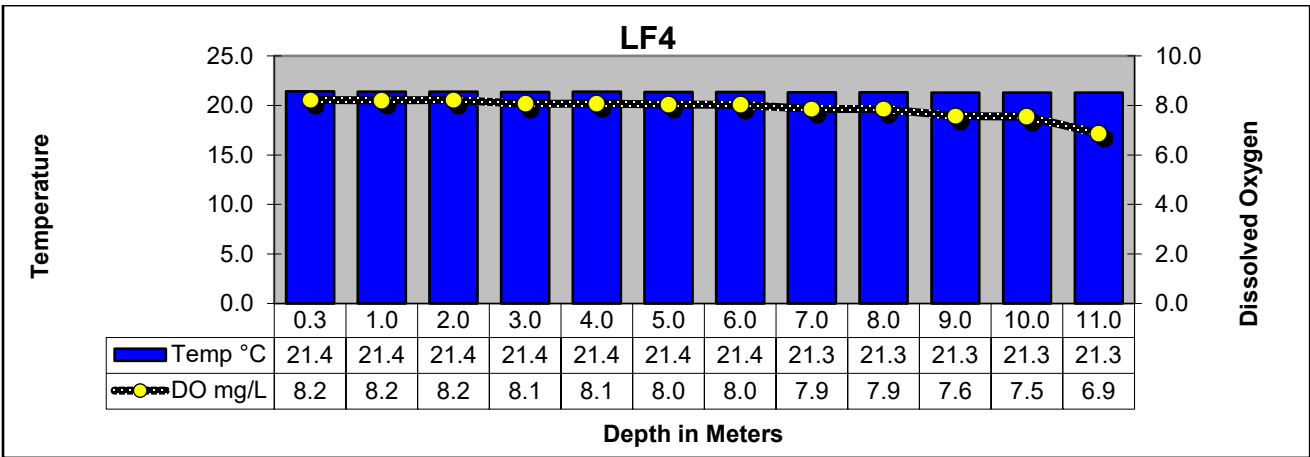


LAKE FORK RESERVOIR MID-COVE IN LAKE FORK CREEK ARM AT FM515

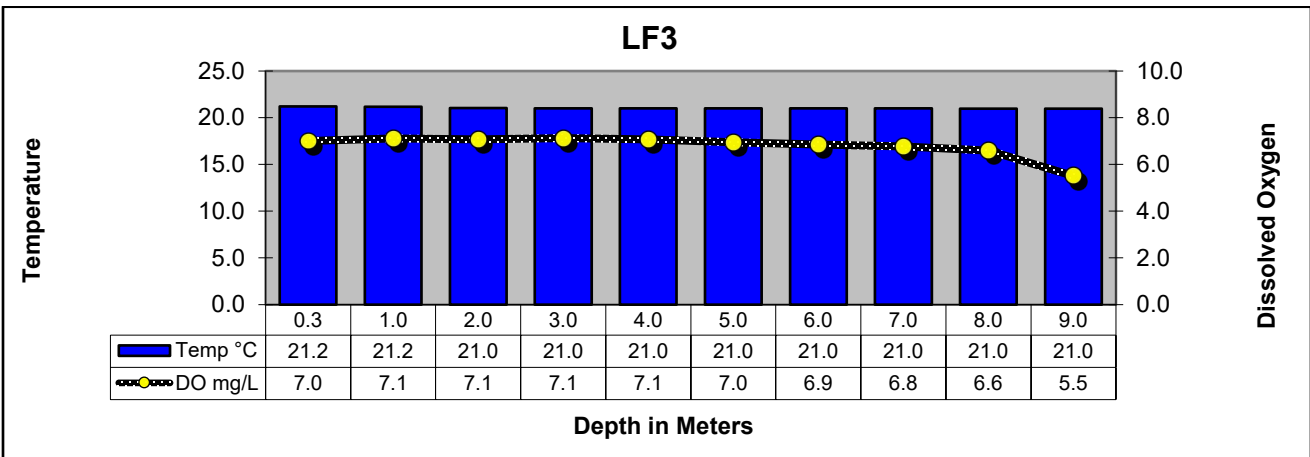

LAKE FORK RESERVOIR MID-ARM IN CANEY CREEK ARM AT FM515

Segments 0506, 0512, 0514 & 0515

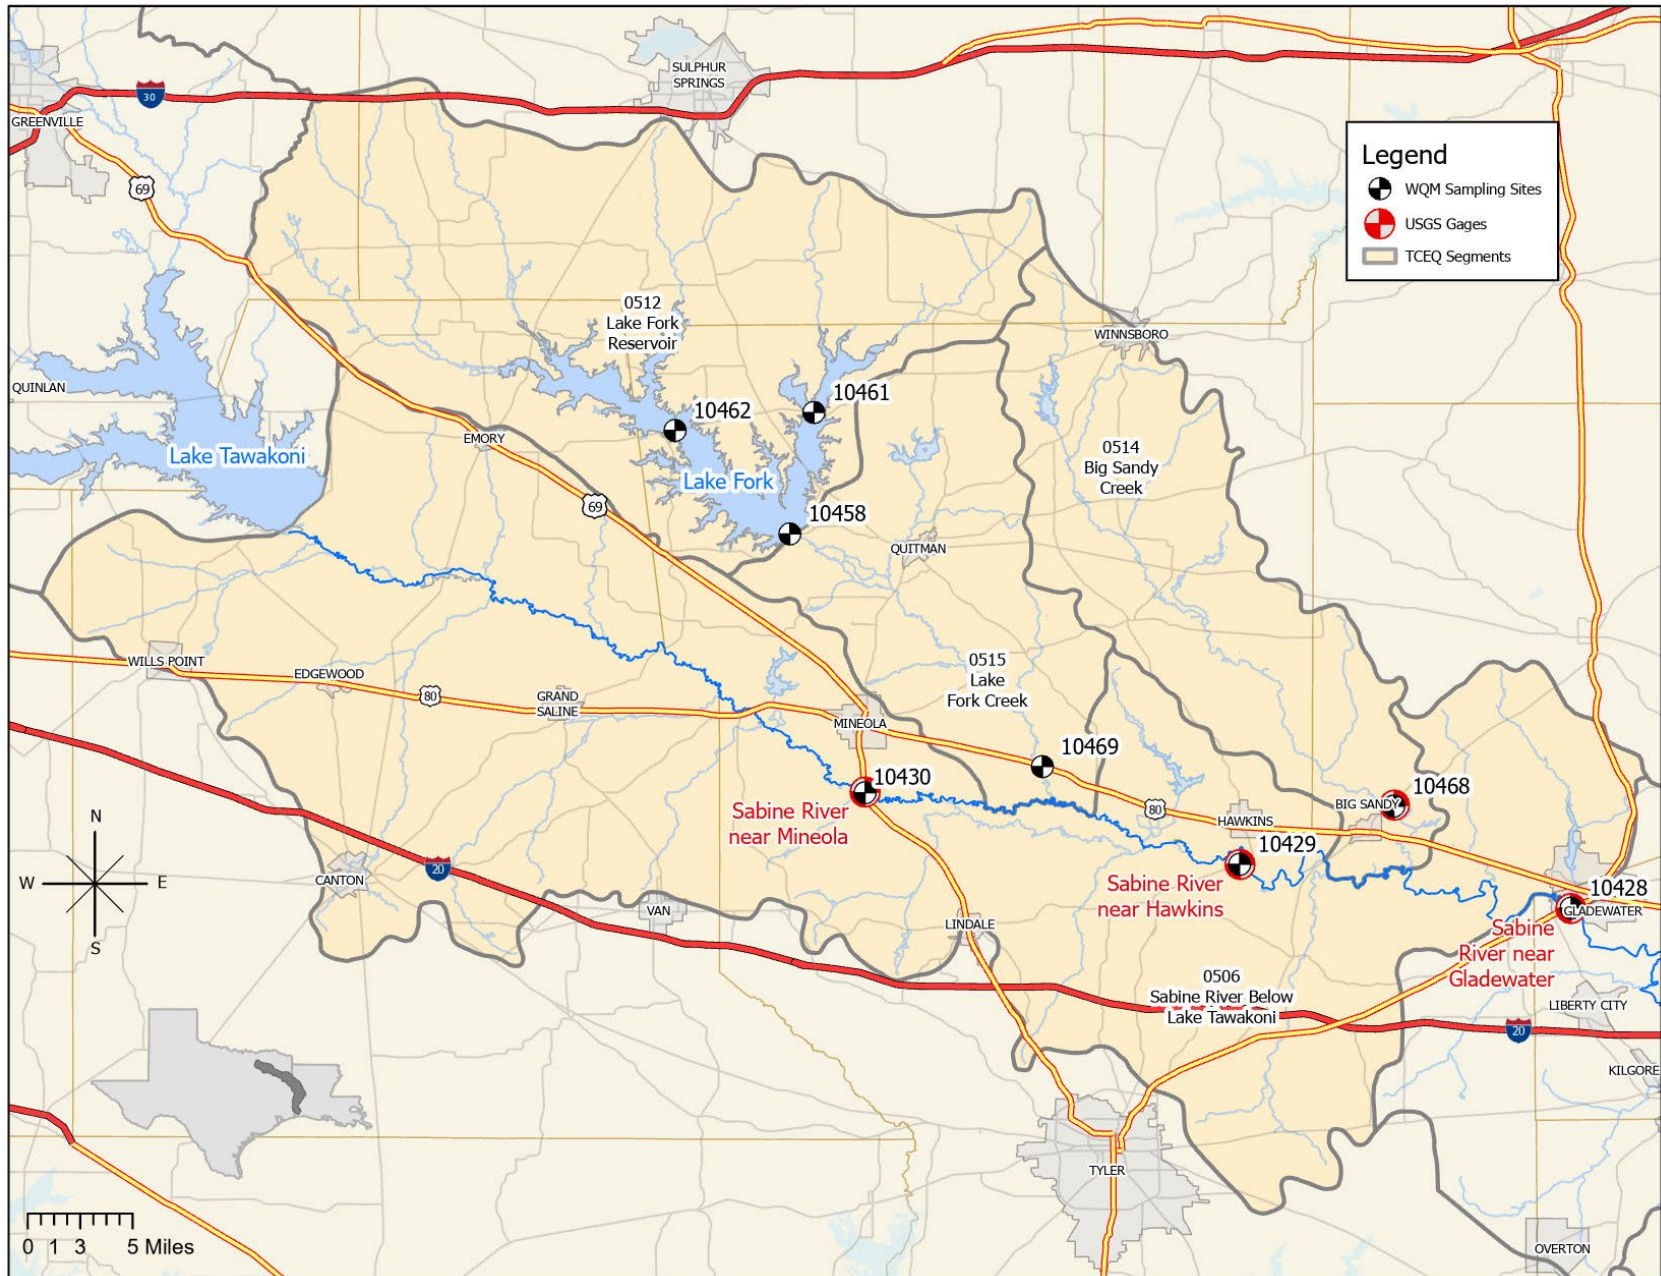


Segment 0507 - Lake Tawakoni

Description: The designated segment includes the impounded Sabine River from Iron Bridge Dam in Rains County up to the normal pool elevation of 437.5 feet msl. Although much of this segment is rural, it contains two cities with populations greater than 5,000 and one of the four largest cities in the Sabine Basin.


Segment 0507 Water Quality

Date and Time	Station	Depth meters	Temp °C	pH	DO mg/L	% Sat	Cond µS/cm	TDS mg/L	Secchi meters	Turbidity NTU	<i>E.coli</i> mpn/100mL
Segment 0507											
11/12/24 10:04	10434(LT23A)	0.3	21.2	8.3	9.6	109	216	138	0.82	3.95	1
		1.0	21.2	8.3	9.5	107	216	138			
		2.0	21.2	8.2	9.4	105	217	139			
		3.0	21.2	8.1	9.2	104	217	139			
		4.0	21.2	8.0	9.1	103	217	139			
		5.0	21.2	7.9	9.0	102	217	139			
		6.0	21.2	7.9	8.8	100	217	139			
		7.0	21.2	7.9	8.8	100	217	139			
		8.0	21.1	7.7	8.8	94	218	139			
		9.0	21.1	7.5	7.9	88	218	140			
		10.0	21.1	7.2	5.3	60	220	140			
		11.0	21.0	7.1	5.0	56	220	140			
		12.0	21.0	7.1	4.8	53	219	140			
		13.0	21.0	7.0	4.3	48	220	141			
		14.0	21.0	7.0	4.1	46	220	141			
11/12/24 09:38	21173(LT23DN)	0.3	20.9	8.0	8.5	94	219	140	0.62	7.15	2
		1.0	21.0	8.1	8.3	94	219	140			
		2.0	21.0	8.0	8.2	92	219	140			
		3.0	21.0	7.9	8.2	93	219	140			
		4.0	21.0	7.9	8.3	93	219	140			
		5.0	21.0	7.8	8.1	92	219	140			
		6.0	21.0	7.8	8.2	92	219	140			
		7.0	21.0	7.8	8.2	93	219	139			
		8.0	21.0	7.7	8.2	92	218	140			
		9.0	21.0	7.6	7.8	87	220	140			
11/12/24 09:00	10437(LT23B)	0.3	20.7	7.6	6.8	77	220	141	0.65	13.1	<1
		1.0	20.7	7.7	6.7	75	220	141			
		2.0	20.7	7.7	6.6	75	221	141			
		3.0	20.7	7.6	6.6	74	220	141			
		4.0	20.7	7.6	6.6	75	221	141			
		5.0	20.7	7.5	6.6	74	221	141			
		6.0	20.7	7.5	6.5	74	221	141			
		7.0	20.7	7.4	6.4	72	221	141			
		8.0	20.6	7.3	5.6	63	223	142			


Lake Tawakoni Reservoir Profiles

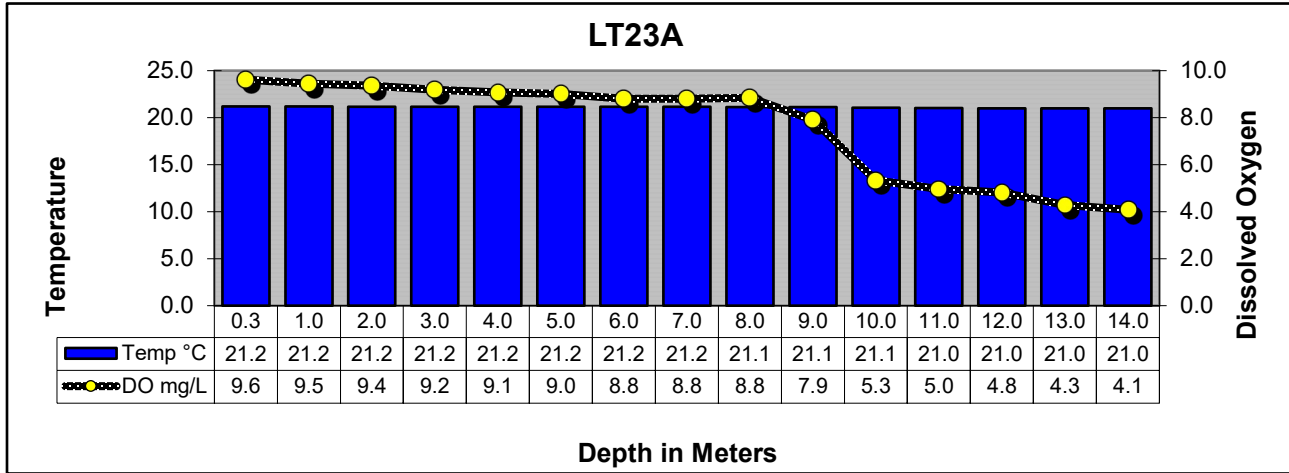

LAKE TAWAKONI IN THE MAIN LAKE NEAR THE DAM

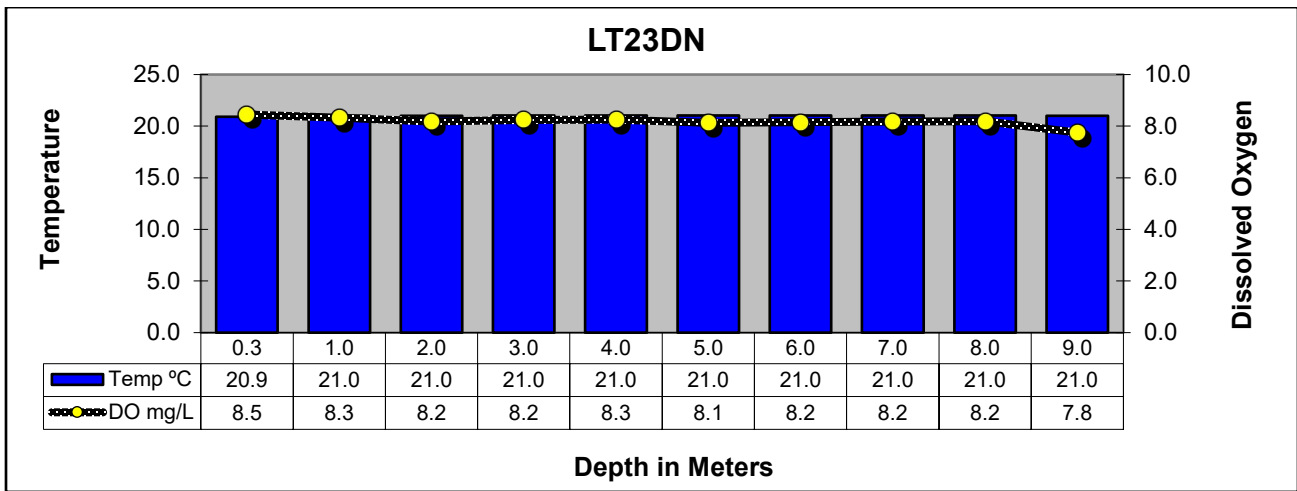

LAKE TAWAKONI IN WACO BAY EQUIDISTANT FROM FINGER AND SPRING POINTS

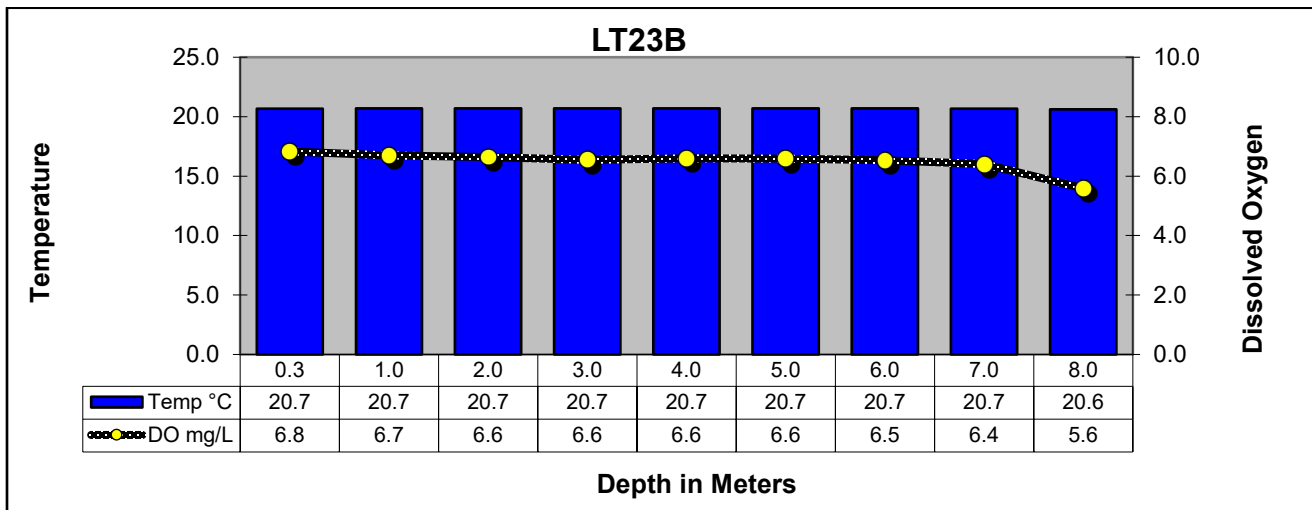

LAKE TAWAKONI AT SH276

Segment 0507

